



## Lecture Ch. 7a

- CAPE
- Stability
- Review of Ch.7 Concepts
  - “Homework” Ch. 7, Prob. 3 for discussion
- Cloud Classification
- Precipitation Processes

Curry and Webster, Ch. 7, 8  
For Tuesday: Finish reading Ch. 8



**Figure 7.1** Regions of stability, instability, and conditional stability illustrated on an aerological diagram. When the environmental lapse rate is less than the saturated adiabatic lapse rate (e.g., lapse rate A), the atmosphere is absolutely stable. When the environmental lapse rate is greater than the saturated lapse rate, but less than the dry adiabatic lapse rate (e.g., lapse rate B), the atmosphere is conditionally stable. When the environmental lapse rate is greater than the dry adiabatic lapse rate (e.g., lapse rate C), the atmosphere is absolutely unstable.



**Figure 7.2** Convective instability illustrated on an aerological diagram. The dashed line represents the environment ( $T$ ) and the solid line represents the parcel ( $T'$ ). Below 810 mb and above 530 mb, energy is required to lift the parcel. Above 810 mb and below 530 mb, the parcel accelerates freely. The dark shaded area represents the convective available potential energy (CAPE), while the two lightly shaded areas represent the convection inhibition energy (CINE).

## CAPE


The amount of energy available for the upward acceleration of a particular parcel is called the *convective available potential energy* (CAPE). On a thermodynamic diagram whose area is proportional to energy (e.g., the emagram; see Section 6.8), CAPE is proportional to the area enclosed by the two curves that delineate the temperature of a parcel and its environment, as illustrated by the darker shaded region in Figure 7.2. The amount of CAPE of a parcel lifted from a height  $z$  (at or above the LFC) to the LNB is given by the vertical integral of the buoyancy force between these levels

$$CAPE(z) = \int_z^{z_{LNB}} g \frac{\rho - \rho'}{\rho} dz \quad (7.24)$$


where the units of CAPE are  $J kg^{-1}$ . If the environment is in hydrostatic equilibrium we can use (1.26) and (1.33) to obtain

$$CAPE(p) = \int_{p(LNB)}^{p(z)} R_d (T'_v - T_v) d(\ln p) \quad (7.25)$$


CAPE is defined only for parcels that are positively buoyant somewhere in the vertical profile. The term *convection inhibition energy* (CINE) is analogous to CAPE but refers to a negative area on the thermodynamic diagram.



**Figure 7.3** An initially stable layer  $A_1B_1$  is made less stable as a result of dry adiabatic ascent.



**Figure 7.5** Vertical mixing of air parcels,  $m_1$  and  $m_2$ , without condensation. Two air parcels, initially at different pressure levels, mix at an intermediate pressure level. The potential temperature of the mixture is a mass-weighted average of the individual parcels' potential temperatures. Mixing of an entire layer results in a constant potential temperature  $\theta$  throughout the layer. This destabilizes an initially stable layer and stabilizes an initially unstable layer. Because the dry adiabat corresponding to  $\theta$  does not intersect the average mixing ratio line,  $w_w$ , the mixing process is dry adiabatic and no condensation occurs.

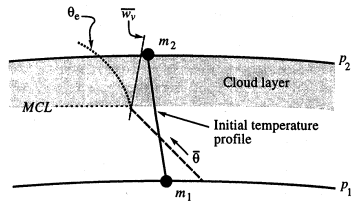

**Figure 7.6** Vertical mixing of air parcels,  $m_1$  and  $m_2$ , with condensation. If the mixing of two air parcels results in an average potential temperature,  $\bar{\theta}$ , that intersects the average mixing ratio line,  $\bar{w}$ , then from the level of intersection upwards, condensation will occur and the final temperature distribution will follow a saturated adiabat,  $\theta_e$ . The lapse rate below the cloud layer moves towards the dry adiabatic lapse rate, while the lapse rate within the cloud layer moves towards the saturated adiabatic lapse rate.

## Chapter 7, Prob. 3

3. Suppose that the environmental lapse rate is dry adiabatic, with a temperature of 280 K at 900 hPa, and a relative humidity of 50%. Consider a parcel of saturated air at 900 hPa at 280 K, initially at rest. If this parcel is given an upward displacement, it will be positively buoyant and will continue to ascend. Neglecting entrainment and aerodynamic resistance, calculate the parcel's upward velocity at 700 hPa, assuming the following:

- elementary parcel theory without including the virtual temperature correction;
- elementary parcel theory including the virtual temperature correction;
- parcel theory with a correction for the weight of condensed water, assuming full adiabatic water content.

$$CAPE(p) = \int_{p(LNB)}^{p(2)} R_d (T'_v - T_v) d(\ln p) \quad (7.25)$$

- Use a mean moist adiabatic lapse rate of 5.77K/km (valid for  $p = 800$  hPa,  $T = 276$  K; assume constant); dry adiabat 9.77K/km (from <http://157.82.240.165/~naoki/comp/calc/index.html>)
  - a) use Eq. 7.25 with  $T$  to get  $CAPE = 295.35$ , assume  $CAPE = KE$  (upper bound),  $v = 24.3$  m/s.
  - b) use Eq. 7.25 with  $T_v$  to get  $CAPE = 331.5$ ,  $v = 25.8$  m/s.
  - c) use Fig. 6.5 to get  $wv = 1.3$  g/kg, then Eq. 7.22 to get  $CAPE$ ,  $v = 24.6$  m/s.
- CAPE is an upper bound on the potential energy that can ever be converted into kinetic energy of a rising buoyant parcel.**